


Rodamiento de agujas NAX7040-IKO

NAX7040-IKO

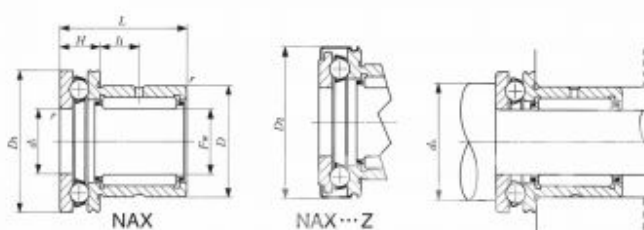

Shaft dia. mm	Identification number					
		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g
70	NAX 7040	555	NAX 7040Z	605	—	—

Boundary dimensions mm								Shoulder diameter d_a mm	Basic dynamic load rating C		Basic static load rating C_0		Allowable rotational speed rpm	
F_w	D	D_1	D_2	L	H	i_0	$r_{\max}$		Radial N	Axial N	Radial N	Axial N		
70	85	95	96.5	40	18	11	1	70	85	55 500	43 100	120 000	101 000	3 500



Rodamiento de agujas NAX7040-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	70
D - Diámetro exterior (mm)	85
C - Espesor (mm)	40
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NAX
Unidad de venta	pieza

