


Rodamiento de agujas NBX1523-Z-IKO

NBX1523-Z-IKO

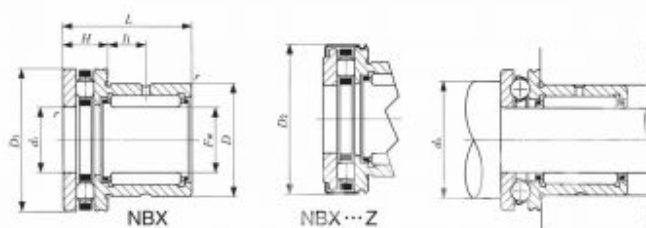

Identification number							
Shaft dia. mm		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover
15	NAX 1523	47,5	NAX 1523Z	48,5	NBX 1523	54	NBX 1523Z
		—	—	—		—	55

Boundary dimensions mm										Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed rpm
F _a	D	D ₁	D ₂	L	H	i ₁	r _{1, max}	d ₁	d ₂	Radial	Axial	Radial	Axial	
15	24	28	29	23	9	6,5	0,3	15	23	12 300	9 930	14 900	12 200	8 500
15	24	28	29	23	9	6,5	0,3	15	26	12 300	10 200	14 900	23 900	14 000



Rodamiento de agujas NBX1523-Z-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	15
D - Diámetro exterior (mm)	24
C - Espesor (mm)	23
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con grasa
Rodamiento serie	NBX
Unidad de venta	pieza

