


# Rodamiento de agujas NBX1523-IKO

## NBX1523-IKO

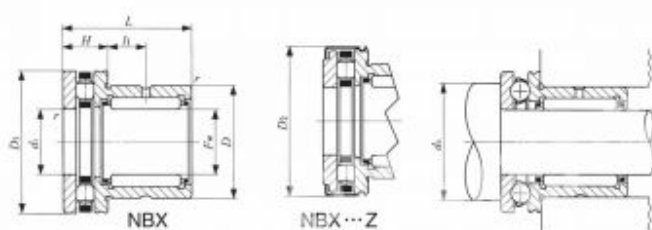

| Shaft dia.<br>mm | Identification number |                  |                 |                  |          |                  |                 |                  |
|------------------|-----------------------|------------------|-----------------|------------------|----------|------------------|-----------------|------------------|
|                  |                       | Mass (Ref.)<br>g | With dust cover | Mass (Ref.)<br>g |          | Mass (Ref.)<br>g | With dust cover | Mass (Ref.)<br>g |
| 15               | NAX 1523              | 47,5             | NAX 1523Z       | 48,5             | NBX 1523 | 54               | NBX 1523Z       | 55               |

| Boundary dimensions<br>mm |    |                |                |    |   |                |                     |                |    | Permissible<br>displacement<br>d <sub>sh</sub><br>mm | Basic dynamic load rating<br>C |       | Basic static load rating<br>C <sub>0</sub> |        | Allowable<br>rotational<br>speed<br>rpm |
|---------------------------|----|----------------|----------------|----|---|----------------|---------------------|----------------|----|------------------------------------------------------|--------------------------------|-------|--------------------------------------------|--------|-----------------------------------------|
| F <sub>a</sub>            | D  | D <sub>1</sub> | D <sub>2</sub> | L  | H | i <sub>1</sub> | r <sub>1, max</sub> | d <sub>1</sub> |    |                                                      | Radial                         | Axial | Radial                                     | Axial  |                                         |
| 15                        | 24 | 28             | 29             | 23 | 9 | 6,5            | 0,3                 | 15             | 23 | 12 300                                               | 9 930                          |       | 14 900                                     | 12 200 | 8 500                                   |
| 15                        | 24 | 28             | 29             | 23 | 9 | 6,5            | 0,3                 | 15             | 26 | 12 300                                               | 10 200                         |       | 14 900                                     | 23 900 | 14 000                                  |



**Rodamiento de agujas NBX1523-IKO**

| Caractéristique            | Valeur                 |
|----------------------------|------------------------|
| d - Diámetro interior (mm) | 15                     |
| D - Diámetro exterior (mm) | 24                     |
| C - Espesor (mm)           | 23                     |
| Marca                      | IKO                    |
| Tipo del rodamiento        | De agujas combinadas   |
| Tipo de jaula              | Acero                  |
| Especificaciones           | Lubricación con aceite |
| Rodamiento serie           | NBX                    |
| Unidad de venta            | pieza                  |

