


Rodamiento de agujas NBX1725-IKO

NBX1725-IKO

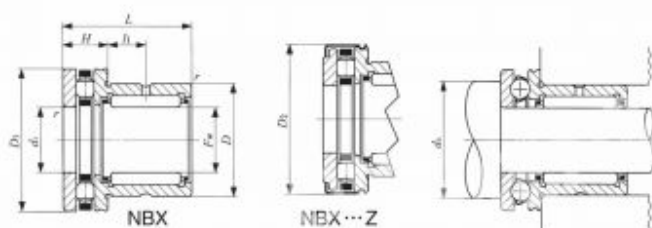

Identification number							
Shaft dia. mm		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover
17	NAX 1725	54	NAX 1725Z	56	NBX 1725	61	NBX 1725Z
						63	

Boundary dimensions mm										Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed rpm
F _a	D	D ₁	D ₂	L	H	i ₁	r _{1, max}	d ₁	d ₂	Radial	Axial	Radial	Axial	
17	26	30	31	25	8	8	0.3	17	25	12 900	10 800	16 300	14 500	8 500
17	26	30	31	25	9	8	0.3	17	28	12 900	11 400	16 300	28 600	13 000



Rodamiento de agujas NBX1725-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	17
D - Diámetro exterior (mm)	26
C - Espesor (mm)	25
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NBX
Unidad de venta	pieza

