


Rodamiento de agujas NBX2530-IKO

NBX2530-IKO

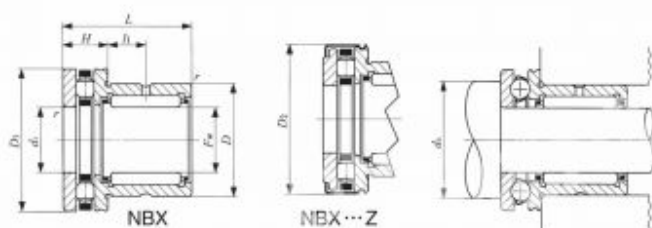

Identification number							
Shaft dia. mm		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover
25	NAX 2530	131	NAX 2530Z	135	NBX 2530	143	NBX 2530Z
						147	

Boundary dimensions mm								Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed rpm
F _a	D	D ₁	D ₂	L	H	i ₁	i ₂	Radial	Axial	Radial	Axial	
25	37	42	43	30	11	9.5	0.6	20 000	19 600	32 100	29 700	7 000
25	37	42	43	30	11	9.5	0.6	20 000	22 700	32 100	60 700	9 000



Rodamiento de agujas NBX2530-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	25
D - Diámetro exterior (mm)	37
C - Espesor (mm)	30
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NBX
Unidad de venta	pieza

