


Rodamiento de agujas NBX3030-IKO

NBX3030-IKO

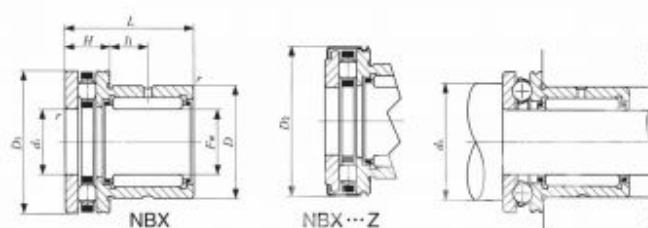

Identification number							
Shaft dia. mm		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover
30	NAX 3030	145	NAX 3030Z	151	NBX 3030	160	NBX 3030Z
						166	

Boundary dimensions mm								Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed rpm
F _a	D	D ₁	D ₂	L	H	i ₁	r _{1, max}	Radial	Axial	Radial	Axial	
30	42	47	48	30	11	9.5	0.6	25 100	20 400	40 100	33 600	6 500
30	42	47	48	30	11	9.5	0.6	25 100	27 400	40 100	81 000	8 000



Rodamiento de agujas NBX3030-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	30
D - Diámetro exterior (mm)	42
C - Espesor (mm)	30
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NBX
Unidad de venta	pieza

