


# Rodamiento de agujas NBX4532-Z-IKO

## NBX4532-Z-IKO

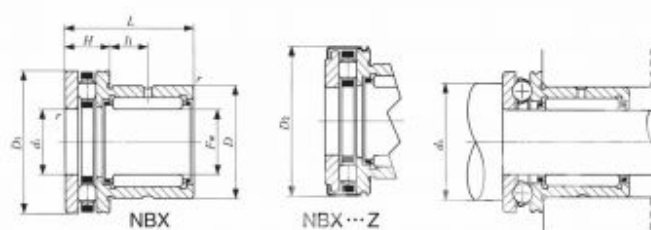

| Identification number |          |                     |                 |                     |          |                     |                 |
|-----------------------|----------|---------------------|-----------------|---------------------|----------|---------------------|-----------------|
| Shaft dia.<br>mm      |          | Mass<br>(Ref.)<br>g | With dust cover | Mass<br>(Ref.)<br>g |          | Mass<br>(Ref.)<br>g | With dust cover |
| 45                    | NAX 4532 | 264                 | NAX 4532Z       | 273                 | NBX 4532 | 293                 | NBX 4532Z       |
|                       |          |                     |                 |                     |          | 302                 |                 |

| Boundary dimensions<br>mm |    |                |                |    |    |                |                  |                |                | Basic dynamic load rating<br>C |        | Basic static load rating<br>C <sub>0</sub> |         | Allowable<br>rotational<br>speed<br>rpm |
|---------------------------|----|----------------|----------------|----|----|----------------|------------------|----------------|----------------|--------------------------------|--------|--------------------------------------------|---------|-----------------------------------------|
| F <sub>a</sub>            | D  | D <sub>1</sub> | D <sub>2</sub> | L  | H  | i <sub>1</sub> | r <sub>max</sub> | d <sub>1</sub> | d <sub>2</sub> | Radial                         | Axial  | Radial                                     | Axial   |                                         |
| 45                        | 58 | 65             | 66.5           | 32 | 14 | 9              | 0.6              | 45             | 57             | 31 000                         | 27 900 | 60 200                                     | 55 100  | 5 000                                   |
| 45                        | 58 | 65             | 66.5           | 32 | 14 | 9              | 0.6              | 45             | 62             | 31 000                         | 40 800 | 60 200                                     | 133 000 | 5 500                                   |



**Rodamiento de agujas NBX4532-Z-IKO**

| Caractéristique            | Valeur                |
|----------------------------|-----------------------|
| d - Diámetro interior (mm) | 45                    |
| D - Diámetro exterior (mm) | 58                    |
| C - Espesor (mm)           | 32                    |
| Marca                      | IKO                   |
| Tipo del rodamiento        | De agujas combinadas  |
| Tipo de jaula              | Acero                 |
| Especificaciones           | Lubricación con grasa |
| Rodamiento serie           | NBX                   |
| Unidad de venta            | pieza                 |

