


Rodamiento de agujas NBX6040-Z-IKO

NBX6040-Z-IKO

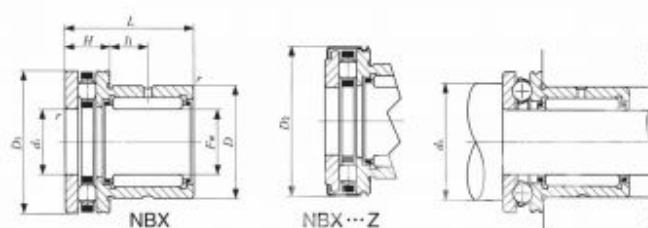

Identification number							
Shaft dia. mm		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover
60	NAX 6040	417	NAX 6040Z	454	NBX 6040	501	NBX 6040Z
							538

Boundary dimensions mm										Permissible displacement d_{sh} mm		Basic dynamic load rating C		Basic static load rating C_0		Allowable rotational speed
F_R	D	D_1	D_2	L	H	i_1	i_2	r_{max}	d_1	Min.	mm	Radial N	Axial N	Radial N	Axial N	rpm
60	72	85	86.5	40	17	12	1	1	60	75	47 500	41 400	103 000	89 700	4 000	
60	72	85	86.5	40	17	12	1	1	60	82	47 500	64 600	103 000	224 000	4 000	



Rodamiento de agujas NBX6040-Z-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	60
D - Diámetro exterior (mm)	72
C - Espesor (mm)	40
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con grasa
Rodamiento serie	NBX
Unidad de venta	pieza

