


Rodamiento de agujas NAXI723-IKO

NAXI723-IKO

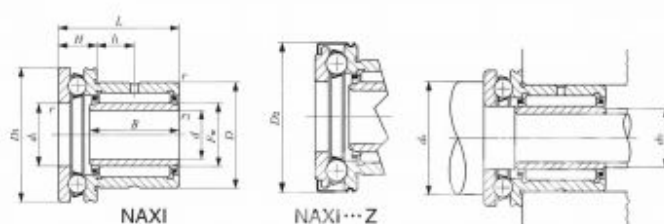

Shaft dia. mm		Identification number						d			D	D ₁
		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover					
7	NAXI 723	43.5	NAXI 723Z	45	—	—	—	7	19	24		

Boundary dimensions mm										Intermediate diameters mm		Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed	Assembled inner ring
D ₂	L	B	H	l ₁	r _{max}	r _{min}	F _w	d ₁	d ₂	d ₃	d ₄	Radial	Axial	Radial	Axial	rpm	
25	23	16	9	6.5	0.3	0.2	10	10	18	9	8	230	10 000	9 190	11 100	9 500	LRT 71016



Rodamiento de agujas NAXI723-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	7
D - Diámetro exterior (mm)	19
C - Espesor (mm)	23
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NAXI
Unidad de venta	pieza

