


Rodamiento de agujas NAXI4032-IKO

NAXI4032-IKO

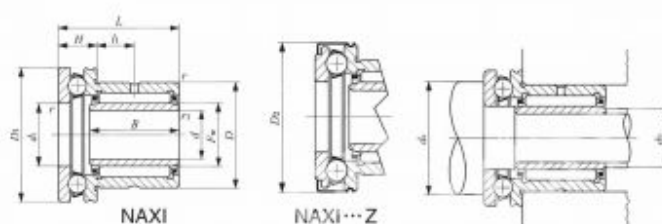

Shaft dia. mm		Identification number								d	D	D ₁
		Mass (Ref.) g	With dust cover	Mass (Ref.) g	With dust cover	Mass (Ref.) g	With dust cover	Mass (Ref.) g	With dust cover			
40	NAXI 4032	315	NAXI 4032Z	324	NBXI 4032	344	NBXI 4032Z	353		40	58	65

Boundary dimensions mm										Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed	Assembled inner ring	
D ₂	L	B	H	I ₁	r _{1max}	r _{1min}	F _w	d ₁	d ₂	Radial	Axial	Radial	Axial			rpm
66.5	32	20	14	9	0.8	0.3	45	45	57	44	31 000	27 900	60 200	55 100	5 000	LRT 404520
66.5	32	20	14	9	0.8	0.3	45	45	62	44	31 000	40 800	60 200	133 000	5 500	LRT 404520



Rodamiento de agujas NAXI4032-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	40
D - Diámetro exterior (mm)	58
C - Espesor (mm)	32
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NAXI
Unidad de venta	pieza

