


Rodamiento de agujas NBXI1223-IKO

NBXI1223-IKO

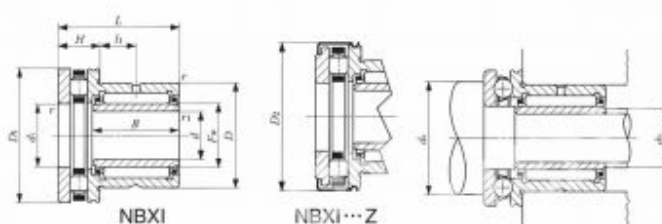

Shaft dia. mm	Identification number								d	D	D ₁
	Mass (Ref.) g	With dust cover	Mass (Ref.) g	With dust cover	Mass (Ref.) g	With dust cover	Mass (Ref.) g	With dust cover			
12	NBXI 1223	55.5	NBXI 1223Z	56.5	NBXI 1223	62	NBXI 1223Z	63	12	24	28

Boundary dimensions mm										Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed	Assembled inner ring			
D ₂	L	B	H	d ₁	d ₂	d ₃	d ₄	d ₅	d ₆							
										Radial	Axial	Radial	Axial			
										N	N	N	N	rpm		
29	23	16.5	9	6.5	0.3	0.3	15	15	23	14	12 300	9 930	14 900	12 200	8 500	LRT 121516
29	23	16.5	9	6.5	0.3	0.3	15	15	26	14	12 300	10 200	14 900	23 900	14 000	LRT 121516



Rodamiento de agujas NBXI1223-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	12
D - Diámetro exterior (mm)	24
C - Espesor (mm)	23
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NBXI
Unidad de venta	pieza

