


Rodamiento de agujas NBXI1730-Z-IKO

NBXI1730-Z-IKO

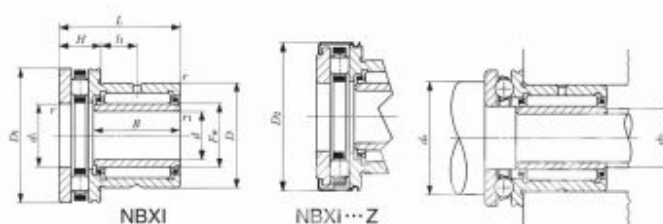

Identification number							
Shaft dia. mm	Mass (Ref.) g	With dust cover Mass (Ref.) g	Mass (Ref.) g	Mass (Ref.) g	With dust cover Mass (Ref.) g	Mass (Ref.) g	d
17	NAXI 1730 99	NAXI 1730Z 103	NBXI 1730 108	NBXI 1730Z 111			

Boundary dimensions mm										Basic dynamic load rating C		Basic static load rating C0		Allowable rotational speed	Assembled inner ring
D2	L	B	H	d1	d2	d3	d4	d5	d6	Radial	Axial	Radial	Axial	rpm	
36	30	20.5	10	10.5	0.3	0.3	20	20	29	17 600	14 200	25 400	19 700	7 500	LRT 172020
36	30	20.5	10	10.5	0.3	0.3	20	20	33	17 600	19 000	25 400	48 700	11 000	LRT 172020



Rodamiento de agujas NBXI1730-Z-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	17
D - Diámetro exterior (mm)	30
C - Espesor (mm)	30
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con grasa
Rodamiento serie	NBXI
Unidad de venta	pieza

