


Rodamiento axial de rodillos cónicos 29468-E-SKF

29468-E-SKF

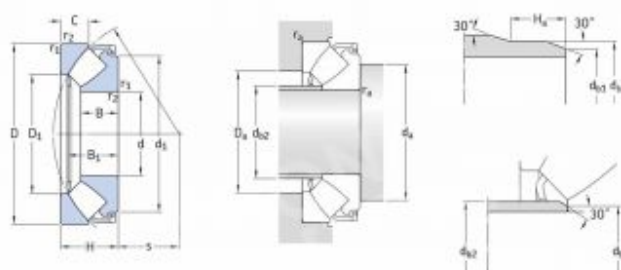

Principal dimensions			Basic load ratings		Fatigue load limit	Minimum load factor	Speed ratings		Mass	Designation
d	D	H	C	C ₀	P ₀	A	Reference speed	Limiting speed	kg	
mm			kN		kN	—	rpm			—
340	620	170	6 700	22 400	3 760	46	560	1 000	220	* 29468 E

Dimensionless								Abutment and fillet dimensions					
d	d ₁	D ₁	B	B ₁	C	r _{1,2}	s	d ₄	d ₄₁	d ₄₂	H ₁	D ₂	r _s
mm						mm		mm					
340	557	445	112	153,4	64	7,5	203	475	363	385	—	530	6



Rodamiento axial de rodillos cónicos 29468-E-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	340
D - Diámetro exterior (mm)	620
C - Espesor (mm)	170
Marca	SKF
Tipo del rodamiento	Rodamiento axial de rodillos cónicos
Tipo de jaula	Acero
Rodamiento serie	29400
Unidad de venta	pieza

