


Rodamiento axial de rodillos cilíndricos 81110-T2-NTN

81110-T2-NTN

 **LE BON
ROULEMENT**

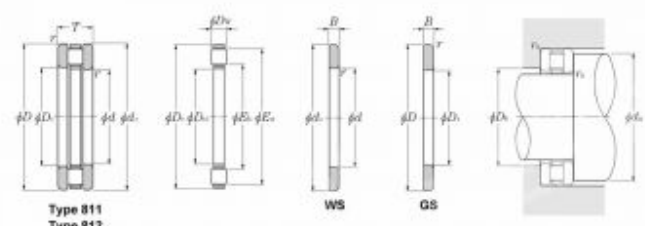

Type 811
Type 812

WS GS

Boundary dimensions										Basic load ratings				Limiting speeds	
d	D	d_1	D_1	r	J_1	J_2	D_2	B	r_{max}	dynamic N	static N	dynamic kgf	static kgf	in oil rpm	in grease rpm
50	70	70	52	14	50	70	6	4	0.6	48 000	150 000	4 900	15 300	1 000	4 000

Bearing numbers				Reference dimensions mm		Abutment dimensions mm			Mass kg		
bearing	first cylindrical roller and cage assembly	inner ring	outer ring	D_1	D_2	r_1 mm	r_2 mm	r_3 mm	811 812 ISO	8111 8112 ISO	811 812 ISO
81110T2	KB1110T2	WS81110	GS81110	53.2	66.4	66	54	0.6	0.165	0.045	0.060



Rodamiento axial de rodillos cilíndricos 81110-T2-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	50
D - Diámetro exterior (mm)	70
C - Espesor (mm)	14
Marca	NTN
Tipo del rodamiento	Rodamiento axial de rodillos cilíndrico
Tipo de jaula	Poliamido
Rodamiento serie	81100
Unidad de venta	pieza

