


Rodamiento axial de rodillos cilíndricos 81216-T2-NTN

81216-T2-NTN

LE BON ROULEMENT

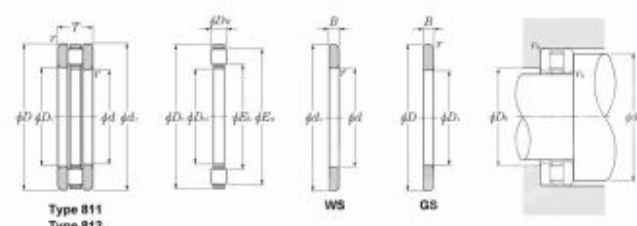

Type 811
Type 812

WS GS

Boundary dimensions										Basic load ratings				Limiting speeds	
d	l_f	r_1	r_2	r_3	r_4	r_5	r_6	r_7	r_8	dynamic N	static kgf	dynamic kgf	static kgf	rpm grease	rpm oil
89	115	115	82	28	80	115	11	8.5	1	142 000	460 000	14 500	47 000	630	2 500

Bearing numbers				Reference dimensions mm		Abutment dimensions mm			Mass kg		
bearing	first cylindrical roller and cage assembly	inner ring	outer ring	E_1	E_2	r_1 mm	r_2 max	r_3 max	811 812 800	811 812 800	811 812 800
81216T2	KB1216T2	WS81216	GS81216	84.8	108.4	105	85	1	0.350	0.250	0.350



Rodamiento axial de rodillos cilíndricos 81216-T2-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	80
D - Diámetro exterior (mm)	115
C - Espesor (mm)	28
Marca	NTN
Tipo del rodamiento	Rodamiento axial de rodillos cilíndrico
Tipo de jaula	Poliamido
Rodamiento serie	81200
Unidad de venta	pieza

