


Rodamiento axial de rodillos cilíndricos 89307-NTN

89307-NTN

 **LE BON
ROULEMENT**

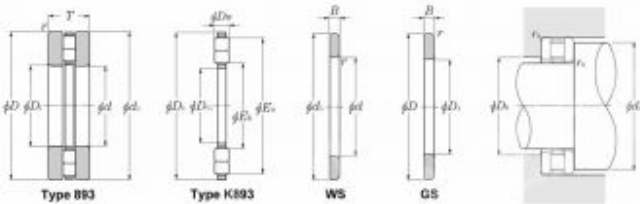

Boundary dimensions											Basic load ratings				Limiting speeds	
mm											dynamic	static	dynamic	static	rpm	
d	D	d_1	D_1	T	d_2	D_2	d_3	D_3	B	r_{max}	C_{10}	C_{10}	C_{10}	C_{10}	grease	oil
35	66	66	37	20	35	66	6	7	1		66 000	214 000	6 750	21 800	1 200	4 600

Bearing numbers				Reference dimensions		Abutment dimensions			Mass		
bearing	first cylindrical roller and cage assembly	inner ring	outer ring	D_1	D_2	d_1	d_2	r_{1a}	811 812 803	K811 K812 K893	WS GS
89307	K89307	WS89307	GS89307	40.0	64.4	84	40	1	0.360	0.064	0.150



Rodamiento axial de rodillos cilíndricos 89307-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	35
D - Diámetro exterior (mm)	68
C - Espesor (mm)	20
Marca	NTN
Tipo del rodamiento	Rodamiento axial de rodillos cilíndrico
Tipo de jaula	Acero
Rodamiento serie	89300
Unidad de venta	pieza

