


Rodamiento axial de rodillos cilíndricos 89312-NTN

89312-NTN

LE BON ROULEMENT

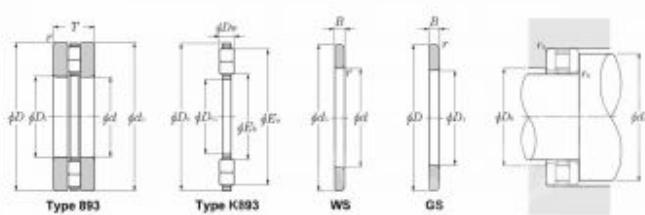

Boundary dimensions											Basic load ratings				Limiting speeds	
d	D	d_1	D_1	T	d_2	D_2	d_3	D_3	B	r_{max}	dynamic N	static N	dynamic kgf	static kgf	in oil	in grease
80	110	110	62	30	60	110	9	10.5	1.1		162 000	600 000	16 500	61 500	600	2 700

Bearing numbers				Reference dimensions		Abutment dimensions			Mass		
bearing	first cylindrical roller and cage assembly	inner ring	outer ring	D_1	D_2	d_1	d_2	r_{1a}	D_{11}	D_{12}	D_{13}
89312	K89312	WS89312	GS89312	68.9	105.3	105	80	1	1.350	0.250	0.550



Rodamiento axial de rodillos cilíndricos 89312-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	60
D - Diámetro exterior (mm)	110
C - Espesor (mm)	30
Marca	NTN
Tipo del rodamiento	Rodamiento axial de rodillos cilíndrico
Tipo de jaula	Acero
Rodamiento serie	89300
Unidad de venta	pieza

