


Rodamiento axial de rodillos cilíndricos K89418-M-INA

K89418-M-INA



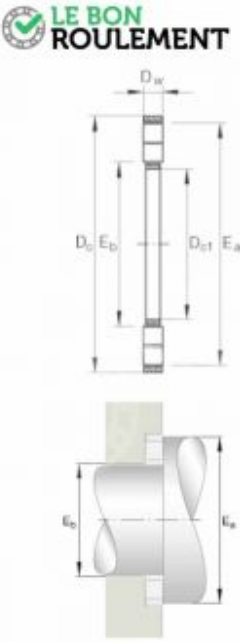

D _{int}	90 mm
D _e	190 mm
D _a	20 mm
E _e	185 mm
E _e	99 mm
m	3,04 kg masse
C _d	680000 N charge dyn. de base, axiale
C _{st}	2200000 N charge statique de base, axiale
C _{lim}	221000 N charge limite à la fatigue
n _c	2040 1/min vitesse limite
n _b	840 1/min vitesse de base
	GS89418 rondelle-logement adaptée
	WS89418 rondelle-arbre adaptée



Rodamiento axial de rodillos cilíndricos K89418-M-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	90
D - Diámetro exterior (mm)	190
C - Espesor (mm)	20
Marca	INA
Tipo del rodamiento	Rodamiento axial de rodillos cilíndrico
Rodamiento serie	K89400
Unidad de venta	pieza

