


Rodamiento oscilante dos hileras de rodillos 21308-CC-C3-W33

21308-CC-C3-W33



Dimensions (mm) Dimension (inch)				Coefficient de charge (N) Load rating (kN)		Vitesse limite (1/min) Speed limit (Rpm)		Poids (kg) Weight (lb)	Sigle Designation	
d (mm)	D (mm)	B (mm)	K (mm)	Dynamique Dynamique C	Statique Statique C ₀	Lubrification Lubrication Graisse Grease	Huile Oil		Alésage cylindrique Cylindrical bore	Alésage conique Tapered bore
40	80	23	5	180	306	7267.5	8150	0.75	21308	21308 K

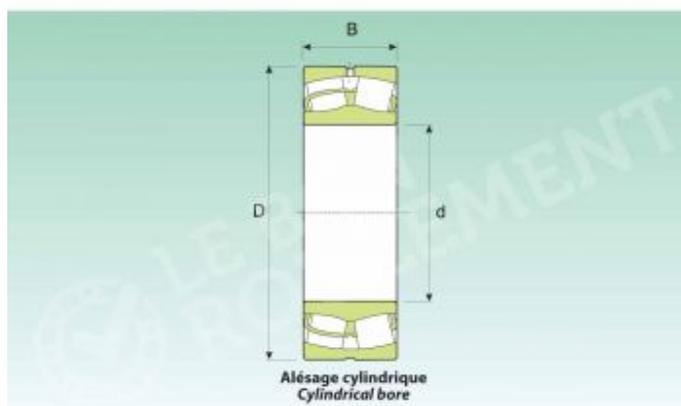

Rodamiento oscilante dos hileras de rodillos 21308-CC-C3-W33

Caractéristique	Valeur
d - Diámetro interior (mm)	40
D - Diámetro exterior (mm)	90
C - Espesor (mm)	23
Marca	Genérica alta calidad
Tipo del rodamiento	Con rodillos oscilantes
Juego	Alta velocidad (C3, J30)
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Rodamiento serie	21300
Unidad de venta	pieza

