


Rodamiento oscilante dos hilas de rodillos 22220-2RS

22220-2RS

LE BON ROULEMENT

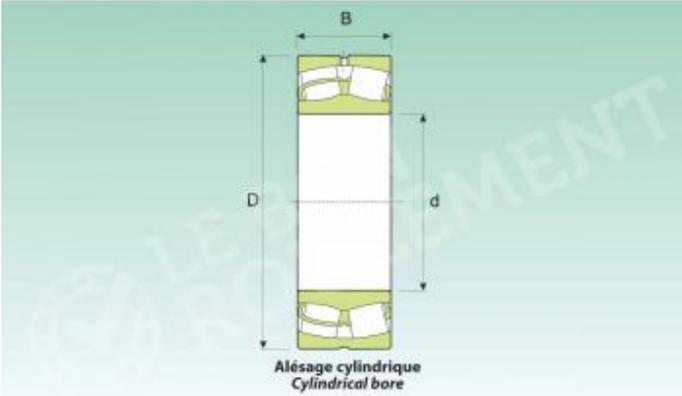

Alésage cylindrique
Cylindrical bore

Dimensions (mm) Dimension (mm)			Coefficient de charge (KM) Load rating (kN)		Vitesse limite (tr/min) Speed limit (RPM)		Lubrification Lubrication		Poids (kg) Weight (kg)	Sigle Designation	
d (mm)	D (mm)	B (mm)	Dynamique Dynamic C _d	Statique Static C _s	Grease	Oil	Alésage cylindrique Cylindrical bore	Alésage conique Tapered bore			
100	100	46	417	490	3425	4000	4.9	22220	22220K		



Rodamiento oscilante dos hileras de rodillos 2220-2RS

Caractéristique	Valeur
d - Diámetro interior (mm)	100
D - Diámetro exterior (mm)	180
C - Espesor (mm)	55
Marca	Genérica alta calidad
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Rodamiento serie	22200
Unidad de venta	pieza

