


Rodamiento oscilante dos hileras de rodillos

22248-E1-C3-FAG

22248-E1-C3-FAG

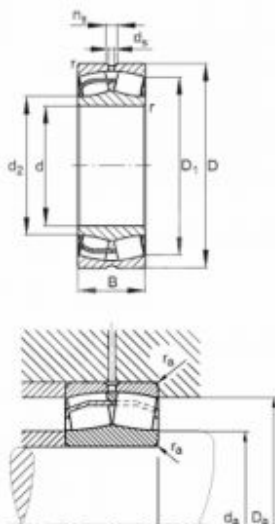

d	240 mm
D	440 mm
B	120 mm
D₁	380,4 mm
D₂ (max)	423 mm
d₁	285,6 mm
d₂ (min)	257 mm
d₃	12,5 mm
n₁	23,5 mm
r_a (max)	3 mm
r_{min}	4 mm
m	83,6 kg Mass
C_r	2230000 N Basic dynamic load rating, radial
C_{0r}	2900000 N Basic static load rating, radial
e	0,26
Y₁	2,55
Y₂	3,8
Y₀	2,5
n₁₁	1900 1/min Limiting speed
n₁₂	1200 1/min Reference speed
C₁₀	247000 N Fatigue limit load, radial



Rodamiento oscilante dos hileras de rodillos 22248-E1-C3-FAG

Caractéristique	Valeur
d - Diámetro interior (mm)	240
D - Diámetro exterior (mm)	440
C - Espesor (mm)	120
Marca	FAG
Tipo del rodamiento	Con rodillos oscilantes
Juego	Alta velocidad (C3, J30)
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Rodamiento serie	22200
Unidad de venta	pieza

