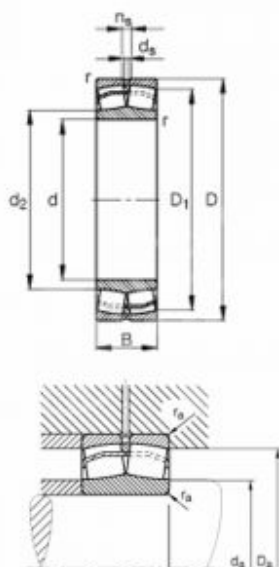


Rodamiento oscilante dos hileras de rodillos

22315-E1-T41A-FAG

22315-E1-T41A-FAG


**LE BON
ROULEMENT**


d	75 mm
D	160 mm
B	56 mm
D_1	138.5 mm
$D_{1\text{ max}}$	148 mm
d_2	82.4 mm
$d_{2\text{ min}}$	87 mm
d_s	4.8 mm
r_s	9.5 mm
r_{max}	2.1 mm
r_{min}	2.1 mm
m	5.36 kg <i>masse</i>
C_d	440000 N <i>charge dyn. de base, radiale</i>
C_{0d}	400000 N <i>charge statique de base, radiale</i>
e	0.34
Y_1	1.30
Y_2	2.98
Y_0	1.54
n_{02}	4500 1/min <i>vitesse limite</i>
n_{01}	2650 1/min <i>vitesse de base</i>
C_{02}	40500 N <i>charge limite radiale à la fatigue</i>



Rodamiento oscilante dos hileras de rodillos 22315-E1-T41A-FAG

Caractéristique	Valeur
d - Diámetro interior (mm)	75
D - Diámetro exterior (mm)	160
C - Espesor (mm)	55
Marca	FAG
Tipo del rodamiento	Con rodillos oscilantes
Juego	Muy alta velocidad (C4)
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Especificaciones	Para aplicacion vibrante
Rodamiento serie	22300
Unidad de venta	pieza

