FICHE TECHNIQUE

Rodamiento oscilante dos hileras de rodillos 22328-CC-JA-W33-VA406-SKF

22328-CC-JA-W33-VA406-SKF

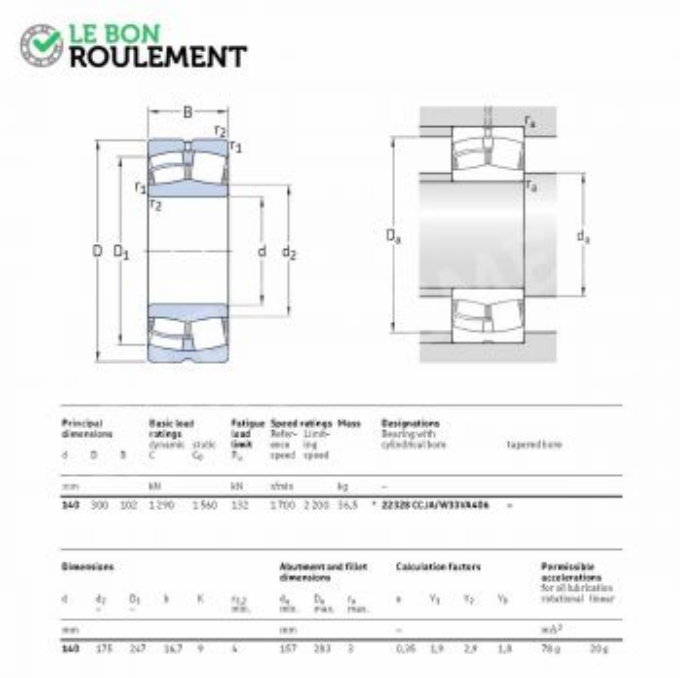

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations
d	D	B	dynamic C	static C_0	P_u	Reference speed	Limiting speed		Bearing with cylindrical bore	tapered bore
mm			kN		kN	r/min		kg	–	
140	300	102	1 290	1 560	132	1 700	2 200	36,5	* 22328 CC/JA/W33VA406	–

Dimensions						Abutment and fillet dimensions			Calculation factors				Permissible accelerations for oil lubrication	
d	d_2 ~	D_1 ~	b	K	$r_{1,2}$ min.	d_a min.	D_a max.	r_a max.	e	Y_1	Y_2	Y_3	rotational	linear
mm						mm			–				m/s²	
140	175	247	16,7	9	4	157	283	3	0,26	1,9	2,9	1,8	78 g	20 g

Commander sur El Mejor Rodamiento

Contacter le service client

FICHE TECHNIQUE

Rodamiento oscilante dos hileras de rodillos 22328-CC-JA-W33-VA406-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	140
D - Diámetro exterior (mm)	300
C - Espesor (mm)	102
Marca	SKF
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Especificaciones	Para aplicacion vibrante
Rodamiento serie	22300
Unidad de venta	pieza

Commander sur El Mejor Rodamiento

Contacter le service client