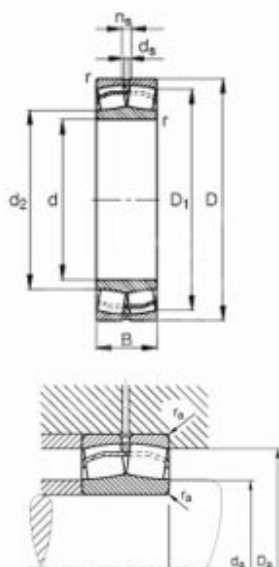


Rodamiento oscilante dos hileras de rodillos

22330-E1-T41D-FAG

22330-E1-T41D-FAG


**LE BON
ROULEMENT**


d	150 mm
D	320 mm
B	108 mm
D₁	273.2 mm
d₂ max	305 mm
d₂	185.3 mm
d₂ min	167 mm
d₃	9.5 mm
r₁	17.7 mm
r_{max}	3 mm
r_{min}	4 mm
m	42.2 kg roulement
C_d	1640000 N charge dyn. de base, radiale
C_{0d}	1800000 N charge statique de base, radiale
e	0.33
Y₁	2.52
Y₂	3
Y₀	1.87
n_d	2290 1/min vitesse limite
n₀	1620 1/min vitesse de base
C_{0d}	147000 N charge limite radiale à la fatigue



Rodamiento oscilante dos hileras de rodillos 22330-E1-T41D-FAG

Caractéristique	Valeur
d - Diámetro interior (mm)	150
D - Diámetro exterior (mm)	320
C - Espesor (mm)	108
Marca	FAG
Tipo del rodamiento	Con rodillos oscilantes
Juego	Muy alta velocidad (C4)
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Especificaciones	Para aplicacion vibrante
Rodamiento serie	22300
Unidad de venta	pieza

