


Rodamiento oscilante dos hileras de rodillos 22340-CC-JA-W33-VA405-SKF

22340-CC-JA-W33-VA405-SKF

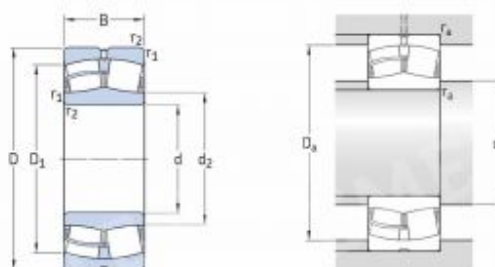

Principal dimensions	Basic load ratings		Fatigue load limit	Speed ratings	Mass	Designations	
d	D	B	C	C ₀	P ₀	Ref. speed	Limiting speed
mm	mm	mm	kN	kN	mm	mm	mm
200	420	138	2320	2900	224	1500	1500

Dimensions					Abutment and fillet dimensions			Calculation factors			Permissible accelerations
d	d ₂	D ₁	b	K	r _{1,2}	d ₃	D ₄	r ₃	V ₁	V ₂	V ₃
mm	mm	mm	mm	mm	mm	mm	mm	mm			
200	249	351	22.3	12	5	220	400	4	0.33	2	3



**Rodamiento oscilante dos hileras de rodillos 22340-CC-JA-
W33-VA405-SKF**

Caractéristique	Valeur
d - Diámetro interior (mm)	200
D - Diámetro exterior (mm)	420
C - Espesor (mm)	138
Marca	SKF
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Especificaciones	Para aplicacion vibrante
Rodamiento serie	22300
Unidad de venta	pieza

