


# Rodamiento oscilante dos hileras de rodillos 24048-CA-C3-W33

24048-CA-C3-W33



| Dimensions (mm)<br>Dimensions (inch) |           |           | Coefficient de charge (kN)<br>Load rating (kN) |                                      | Vitesse limite (1/min)<br>Speed limit (Rpm) |       | Poids (kg)<br>Weight (kg) | Sigle<br>Designation                    |                                 |
|--------------------------------------|-----------|-----------|--|--------------------------------------|---|-------|---------------------------|---|---------------------------------|
| d<br>(mm)                            | D<br>(mm) | B<br>(mm) | Dynamique<br>Dynamic<br>C                      | Statique<br>Static<br>C <sub>0</sub> | Lubrification<br>Lubrication                | 24048 |                           | Alésage cylindrique<br>Cylindrical bore | Alésage conique<br>Tapered bore |
| 240                                  | 304       | 136       | 8  | 1568                                 | 3040  |       | 1224                      | 1040                                    | 41                              |

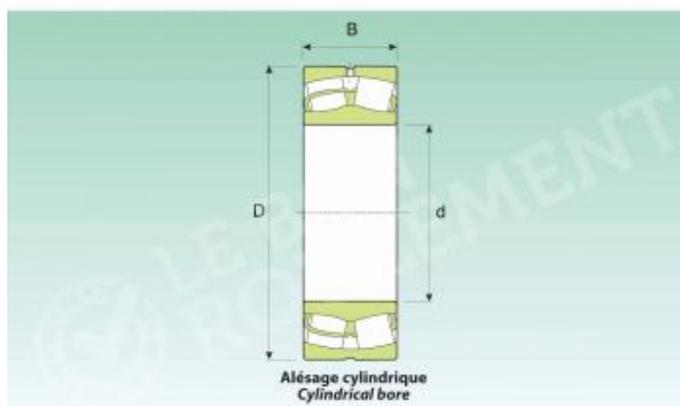

**Rodamiento oscilante dos hileras de rodillos 24048-CA-C3-W33**

| <b>Caractéristique</b>     | <b>Valeur</b>            |
|----------------------------|--------------------------|
| d - Diámetro interior (mm) | 240                      |
| D - Diámetro exterior (mm) | 360                      |
| C - Espesor (mm)           | 118                      |
| Marca                      | Genérica alta calidad    |
| Tipo del rodamiento        | Con rodillos oscilantes  |
| Juego                      | Alta velocidad (C3, J30) |
| Tipo de sellado            | No estanco               |
| Tipo de jaula              | Macisa latón             |
| Agujero                    | Cilíndrico/a             |
| Rodamiento serie           | 24000                    |
| Unidad de venta            | pieza                    |

