


# Rodamiento oscilante dos hileras de rodillos 24126-CA-K30-C3-W33

24126-CA-K30-C3-W33



Dimensions (mm) Dimension (inch)			Coefficient de charge (EN) Load rating (kN)		Vitesse linéaire (m/min) Speed limit (ft/min)		Poids (kg) Weight (lb)	Style Designation	
d (mm)	D (mm)	B (mm)	Dynamique Dynamic C <sub>r</sub>	Statique Static C <sub>0</sub>	Lubrification Lubrication	Alésage cylindrique Cylindrical bore		Alésage conique Tapered bore	
130	218	80	665	950	1830		2350		11

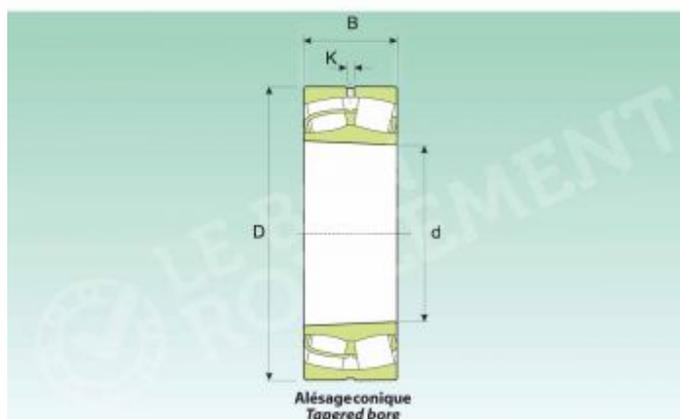

**Rodamiento oscilante dos hileras de rodillos 24126-CA-  
K30-C3-W33**

<b>Caractéristique</b>	<b>Valeur</b>
d - Diámetro interior (mm)	130
D - Diámetro exterior (mm)	210
C - Espesor (mm)	80
Marca	Genérica alta calidad
Tipo del rodamiento	Con rodillos oscilantes
Juego	Alta velocidad (C3, J30)
Tipo de sellado	No estanco
Tipo de jaula	Macisa latón
Agujero	Cónico/a
Rodamiento serie	24100
Unidad de venta	pieza

