


Rodamiento oscilante dos hileras de rodillos

24144-E1-FAG

24144-E1-FAG

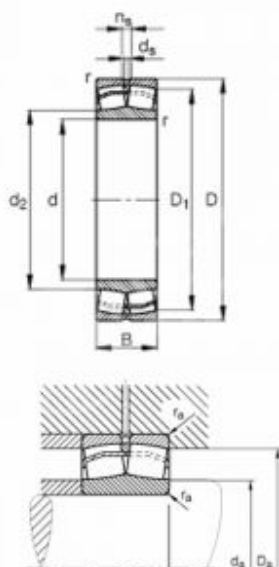

d	220 mm
D	370 mm
B	150 mm
D₁	314.5 mm
D₁ max	365 mm
d₁	247.6 mm
d₁ min	237 mm
d₂	6.3 mm
r₁	12.2 mm
r₂ max	3 mm
r₂ min	4 mm
m	64 kg roulement
C_r	2190000 N charge dyn. de base, radiale
C_{0r}	3250000 N charge statique de base, radiale
e	0.29
Y₁	1.74
Y₂	2.59
Y₀	1.7
n_L	1650 1/min vitesse limite
n_B	750 1/min vitesse de base
C₁₀	200000 N charge limite radiale à la fatigue



Rodamiento oscilante dos hileras de rodillos 24144-E1-FAG

Caractéristique	Valeur
d - Diámetro interior (mm)	220
D - Diámetro exterior (mm)	370
C - Espesor (mm)	150
Marca	FAG
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Rodamiento serie	24100
Unidad de venta	pieza

