


Rodamiento oscilante dos hileras de rodillos 24148-B-C3-FAG

24148-B-C3-FAG


**LE BON
ROULEMENT**


d	240 mm
D	400 mm
B	160 mm
D ₂	338 mm
D _{a min}	383 mm
d ₂	267.3 mm
d _{a min}	257 mm
d _s	6.3 mm
n ₃	12.2 mm
f _{a min}	3 mm
f _{min}	4 mm
m	83.2 kg Mass
C _r	2800000 N Basic dynamic load rating, radial
C _{0r}	3800000 N Basic static load rating, radial
e	0.39
Y ₁	1.71
Y ₂	2.54
Y ₀	1.67
n ₀₃	1470 1/min Limiting speed
n ₀	650 1/min Reference speed
C _{0r}	330000 N Fatigue limit load, radial

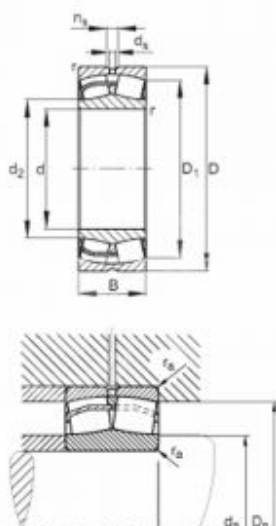

Rodamiento oscilante dos hileras de rodillos 24148-B-C3-FAG

Caractéristique	Valeur
d - Diámetro interior (mm)	240
D - Diámetro exterior (mm)	400
C - Espesor (mm)	160
Marca	FAG
Tipo del rodamiento	Con rodillos oscilantes
Juego	Alta velocidad (C3, J30)
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Rodamiento serie	24100
Unidad de venta	pieza

