


Rodamiento de rodillos cónicos T4EE160/VB406-SKF

T4EE160/VB406-SKF

LE BON ROULEMENT

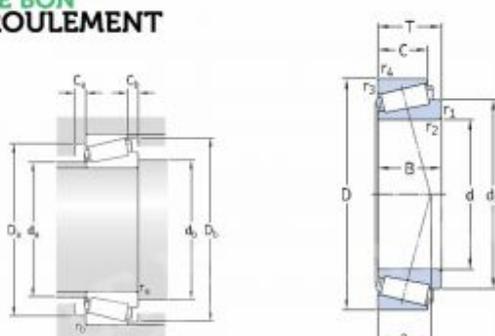

Principal dimensions		Basic load ratings		Fatigue load limit	Speed ratings	Mass	Designation	Dimension series to ISO 335 (ABMA)		
d	D	T	C	C_0	Ref. speed	Limiting speed				
mm	MM	MM	MM	MM	r/min	kg				
160	240	62	528	900	94.5	1 800	2 600	30E	T4EE 160/VB406	4E2

Dimensions			Mounting and fillet dimensions										Calculation factors							
d	d_1	B	C	$r_{1,2}$	$r_{3,4}$	a	e_1	e_2	D_1	D_2	D_3	D_4	C_1	C_2	T_1	T_2	α	γ	γ_0	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	%	%
160	204	59	50	3	2	57	174	182	212	216	236	10	11	3	2	0.44	1.35	0.8		



Rodamiento de rodillos cónicos T4EE160/VB406-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	160
D - Diámetro exterior (mm)	245
C - Espesor (mm)	61
Marca	SKF
Tipo del rodamiento	Con rodillos cónicos
Espesor de	59
Espesor de la cubeta	50
Rodamiento serie	ISO
Unidad de venta	pieza

