


Rodamiento de rodillos cilíndricos SL045020-PP-2NR-C3-INA

SL045020-PP-2NR-C3-INA

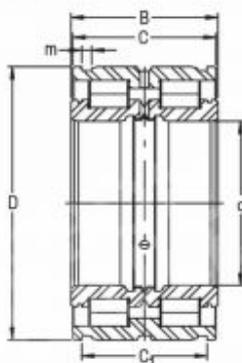

PART NUMBER	SHAFT d	SHAFT d	OD D	OD D	WIDTH INNER RING B	WIDTH INNER RING B	WIDTH OUTER RING C	WIDTH OUTER RING C	WEIGHT PER PIECE	WEIGHT PER PIECE
	inch	mm	inch	mm	inch	mm	inch	mm	lb	kg
SL04 5020	3.937	100	8.908	228	2.638	67	2.588	66	0.71	3.85

DYN. CAP. C	DYN. CAP. C	STAT. CAP. C ₀	STAT. CAP. C ₀	GRINDING C _u	GRINDING C _u	GRINDING WIDTH d ₁	GRINDING WIDTH d ₁	SHAFT FINISH	SPEED LIMIT RPM	PART NUMBER
lb	mm	lb	mm	inch	mm	inch	mm		rpm	
74.000	330	124.000	560	2.331	59.2	0.105	4.2	HRC150	2000	SL04 5020



Rodamiento de rodillos cilíndricos SL045020-PP-2NR-C3-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	100
D - Diámetro exterior (mm)	150
C - Espesor (mm)	67
Marca	INA
Tipo del rodamiento	Con rodillos cilíndricos
Juego	Alta velocidad (C3, J30)
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Especificaciones	Ranura de clips + clips
Rodamiento serie	SL
Unidad de venta	pieza

