


Rodamiento de rodillos cilíndricos NJG2309-VH-C3-VB027-SKF

NJG2309-VH-C3-VB027-SKF

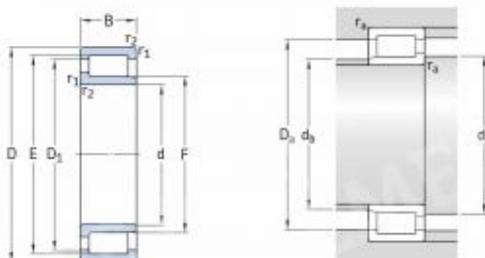

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
d	B	B	C	C ₀	P ₀	Reference speed	Limiting speed	kg	
mm			kN		kN	r/min			
45	100	36	172	296	25.5	2 800	3 400	1.45	NJG 2309 VH

Dimensions							Abutment and fillet dimensions							Calculation factor
d	d ₁	D ₃	E, E	r _{1,2}	r _{3,4}	s	d ₁	d ₂	d ₃	D ₃	D ₃	r ₃	r ₃	k
mm				min.	min.		min.	max.	max.	max.	max.	max.	max.	
45	42.5	80.1	56.34	1.5	-	2.4	54	59.3	54	93	-	1.5	-	0.35



Rodamiento de rodillos cilíndricos NJG2309-VH-C3-VB027-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	45
D - Diámetro exterior (mm)	100
C - Espesor (mm)	36
Marca	SKF
Tipo del rodamiento	Con rodillos cilíndricos
Juego	Alta velocidad (C3, J30)
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Rodamiento serie	NJG2300
Unidad de venta	pieza

