


Rodamiento de rodillos cilíndricos NCF2952-CV-SKF

NCF2952-CV-SKF

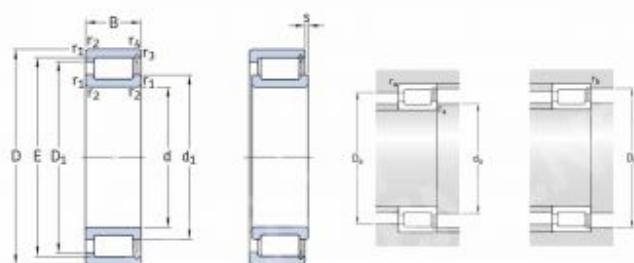

Principal dimensions	Basic load ratings		Fatigue load limit	Speed ratings	Mass	Designation	
d	D	B	C ₀	P ₀	rev/min	kg	-
mm			kN	kN			
260	360	60	737	1430	143	750	950
						18.5	NCF 2952 CV

Dimensions			Aperture and fillet dimensions						Calculation factor				
d	d ₁	D ₁	r _E , E	r _{LJ} min.	r _{LJ} max.	x	d ₄ min.	d ₄ max.	D ₅ min.	D ₅ max.	r ₂ min.	r ₂ max.	K ₁
mm													-
260	291	323	333,7	2,1	3,5	3,5	273	287	-	348	351	2	1,5



[Commander sur El Mejor Rodamiento](#)

[Contacter le service client](#)

Rodamiento de rodillos cilíndricos NCF2952-CV-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	260
D - Diámetro exterior (mm)	360
C - Espesor (mm)	60
Marca	SKF
Tipo del rodamiento	Con rodillos cilíndricos
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Rodamiento serie	NCF2900
Unidad de venta	pieza

[Commander sur El Mejor Rodamiento](#)[Contacter le service client](#)