


Rodamiento axial de bolas 234415-M-SP-FAG

234415-M-SP-FAG

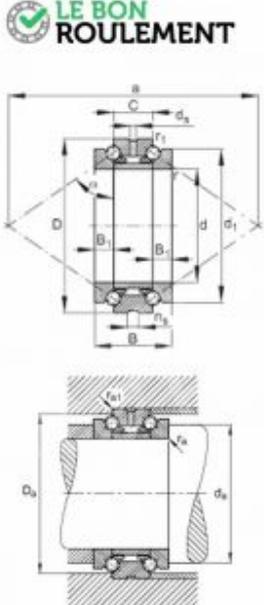

LE BON ROULEMENT

d	75 mm
D	115 mm
B	43 mm
Dimensions	
a	191,5 mm
D₁	12 mm
C	24 mm
D₂	103,5 mm Tolerance H12
d₁	102 mm
d₂	91,5 mm Tolerance h12
d₃	3,2 mm
r_s	0,5 mm
r_{max}	0,3 mm
r_{min}	1,1 mm
r_{ext}	0,3 mm
r_{int}	1,1 mm
α	60 ° Contact angle
Performance	
m	1,57 kg Mass
C_d	47500 N Basic dynamic load rating, axial
C_{0a}	144000 N Basic static load rating, axial
n_{DM}	5000 1/min Limiting speed for grease lubrication
n_{DM} G	6700 1/min Limiting speed for minimal quantity of lubrication
C_{DM}	12800 N Fatigue limit load, axial
F₀	340 N Preload force
F_{0a}	900 N Lift-off force The lift-off force is the force at which the row of balls released from load by an axial force acting concentrically on the bearing becomes free of load.
C_r	508 N/mm Axial rigidity The values are valid up to an axial force of 2,2% of the basic dynamic load rating C _d .



Rodamiento axial de bolas 234415-M-SP-FAG

Caractéristique	Valeur
d - Diámetro interior (mm)	75
D - Diámetro exterior (mm)	115
C - Espesor (mm)	48/24
Marca	FAG
Tipo del rodamiento	Rodamiento axial de bolas
Tipo de jaula	Macisa latón
Rodamiento serie	234000
Unidad de venta	pieza

