


Rodamiento de bolas E2-625-2Z-C3-SKF

E2-625-2Z-C3-SKF

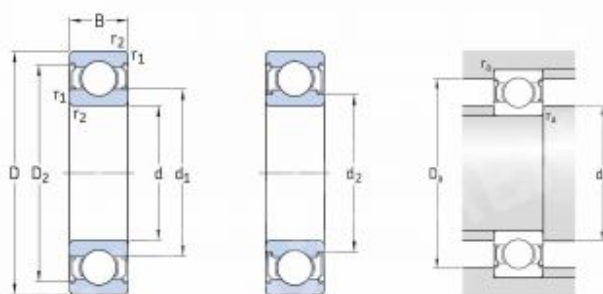

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
d	D	B	C	C ₀	P ₀	Reference speed	Limiting speed	kg	Bearing capped on both sides	case side
mm			kN		kN	rpm			—	
5	16	5	1,14	0,38	0,014	104 000	55 000	0,005	E2-625-2Z	—

Dimensions					Abutment and fillet dimensions				Calculation factors	
d ₁	d ₂	d ₃	D ₁	r _{1,2} min.	d ₄ min.	d ₄ max.	D ₅ min.	r ₆ max.	y ₀	y ₁
mm					mm				—	
5	8,4	—	13,3	0,2	7,4	8,3	12,6	0,3	0,025	0,4



Rodamiento de bolas E2-625-2Z-C3-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	5
D - Diámetro exterior (mm)	16
C - Espesor (mm)	5
Marca	SKF
Tipo del rodamiento	De bolas
Juego	Alta velocidad (C3, J30)
Tipo de sellado	Doble estanco metal (ZZ, 2Z, 2RZ)
Tipo de jaula	Acero
Rodamiento serie	620
Unidad de venta	pieza

