


Rodamiento de agujas NAO12X24X20

NAO12X24X20



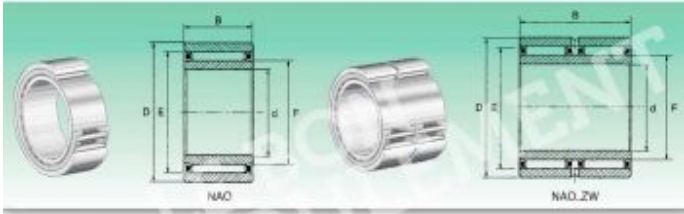

Designation Designation	Weight Poids (g)	Dimensions (mm) Dimensions (mm)						Coefficients de charge (N) Basic load ratings (N)		Vitesse limite Limiting Speed
		d	D	B	F	E	e	Dynamique C Dynamic C	Statique C Static C	
NAO 12x24x12	29	12	24	12	16	28	9.452	11.200	22.900	
NAO 12x24x18	45	12	24	20	16	28	12.635	13.610	22.900	
NAO 12x28x12	36.8	12	28	12	16	32	10.906	11.900	20.900	



Rodamiento de agujas NAO12X24X20

Caractéristique	Valeur
d - Diámetro interior (mm)	12
D - Diámetro exterior (mm)	24
C - Espesor (mm)	20
Marca	Genérica alta calidad
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Rodamiento serie	NAO
Unidad de venta	pieza

