


Rodamiento de agujas NAO12X28X12

NAO12X28X12



LE BON

ROULEMENT

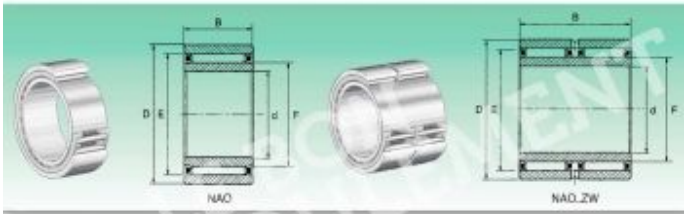

Designation Designation	Weight Poids (g)	Dimensions (mm) Dimensions (mm)					Coefficients de charge (N) Basic load ratings (N)		Vitesse limite Limiting Speed
		d	D	B	F	E	Dynamique C Dynamic C	Statique C Static C	
NAO 12x28x12	29	12	28	12	16	28	9 450	11 200	22 800
NAO 12x28x12	45	12	28	12	16	28	12 655	13 810	22 800
NAO 12x28x12	30.8	12	28	12	16	22	10 806	11 900	20 800



Rodamiento de agujas NAO12X28X12

Caractéristique	Valeur
d - Diámetro interior (mm)	12
D - Diámetro exterior (mm)	28
C - Espesor (mm)	12
Marca	Genérica alta calidad
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Rodamiento serie	NAO
Unidad de venta	pieza

