


Rodamiento de agujas NAO30X47X18

NAO30X47X18



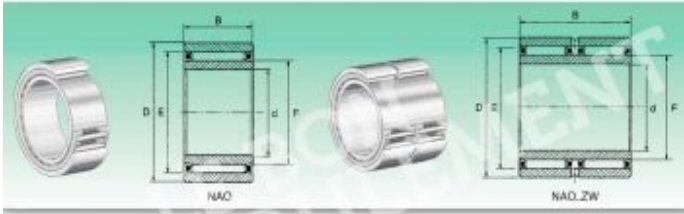

Designation Designation	Weight Poids (g)	Dimensions (mm) Dimensions (mm)					Coefficients de charge (N) Basic load ratings (N)		Vitesse limite Limiting Speed
		d	D	B	F	E	Dynamique C Dynamic C	Statique C Static C	
NAO 30x45x13	71	30	45	13	35	42	15 300	26 600	12 000
NAO 30x45x17	100	30	45	17	35	48	19 700	36 600	12 300
NAO 30x45x18 - ZW	150	30	45	18	35	48	26 100	53 200	12 300
NAO 30x47x16	89.8	30	47	16	35	42	21 100	35 600	12 300
NAO 30x47x18	108	30	47	18	35	42	26 100	49 600	12 300
NAO 30x52x18	172	30	52	18	37	48	26 600	49 225	11 000



Rodamiento de agujas NAO30X47X18

Caractéristique	Valeur
d - Diámetro interior (mm)	30
D - Diámetro exterior (mm)	47
C - Espesor (mm)	18
Marca	Genérica alta calidad
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Rodamiento serie	NAO
Unidad de venta	pieza

