


Rodamiento de agujas NAO50X68X20

NAO50X68X20



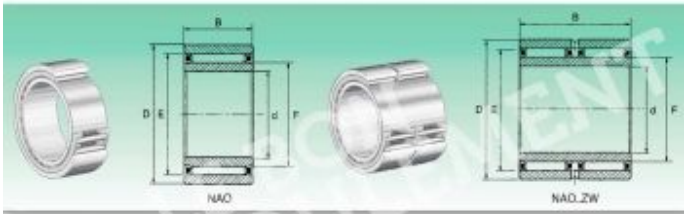

Designation Designation	Weight Poids (g)	Dimensions (mm) Dimensions (mm)					Coefficients de charge (N) Basic load ratings (N)		Vitesse limite Limiting Speed
		d	D	B	F	E	Dynamique C Dynamic C	Statique C Static C	
NAO50X68X20	219	50	68	20	55	60	27 100	62 100	8 100
NAO.ZW50X68X20	408	50	78	20	60	68	41 325	80 750	6 500



Rodamiento de agujas NAO50X68X20

Caractéristique	Valeur
d - Diámetro interior (mm)	50
D - Diámetro exterior (mm)	68
C - Espesor (mm)	20
Marca	Genérica alta calidad
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Rodamiento serie	NAO
Unidad de venta	pieza

