


Rodamiento de bolas 61816-2RS1-SKF

61816-2RS1-SKF

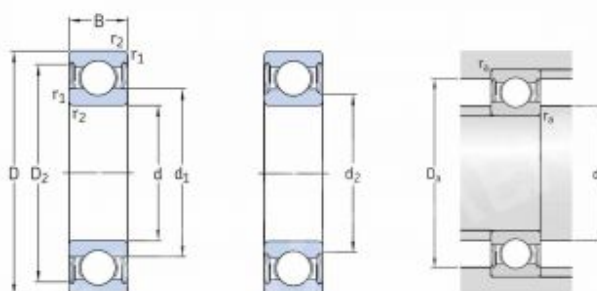

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
d	D	B	C	C ₀	P ₀₄	Reference speed	Limiting speed	kg	Bearing capped on both sides	one side
mm					kN	n/min			—	
80	100	10	13	55	0,44	—	3 600	0,15	61804-2RS1	—

Dimensions				Abutment and fillet dimensions				Calculation factors	
d	d ₁	D ₂	r _{1,2} min.	d ₀ min.	d ₁ max.	D ₀ max.	r ₀ max.	k ₀	f ₀
mm				mm				—	
80	85,8	95,5	0,6	83,2	86,5	96,8	0,6	0,015	17



Rodamiento de bolas 61816-2RS1-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	80
D - Diámetro exterior (mm)	100
C - Espesor (mm)	10
Marca	SKF
Tipo del rodamiento	De bolas
Juego	Estándar
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Rodamiento serie	61800 - 6800
Unidad de venta	pieza

