


Rodamiento de bolas 61928-MA-C3-SKF

61928-MA-C3-SKF

LE BON ROULEMENT

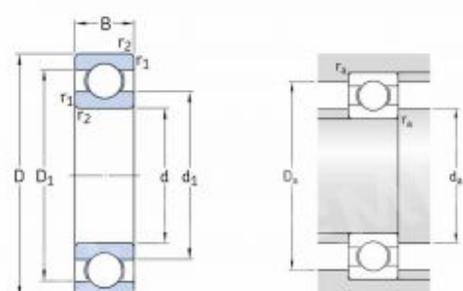

| Principal dimensions | | | Basic load ratings | | Fatigue | Speed ratings | | Mass | Designation |
|----------------------|-----|----|--------------------|----------------|----------------|-----------------|----------------|------|-------------|
| d | D | B | C | C ₀ | P ₀ | Reference speed | Limiting speed | kg | |
| mm | | | kN | | kN | r/min | | | |
| 140 | 190 | 24 | 66,3 | 72 | 2,34 | 7 000 | 5 400 | 2 | 61928 MA |

| Dimensions | | | | | Abutment and fillet dimensions | | | Calculation factors | |
|------------|----------------|----------------|----------------|------------------------|--------------------------------|----------------------|----------------------|---------------------|----------------|
| d | d ₂ | D ₁ | D ₂ | r _{1,2} mm | r ₃ mm | D ₂ mm | r ₄ mm | k ₁ | f ₀ |
| mm | | | | | | | | | |
| 140 | 156 | 175 | - | 1,5 | 147 | 183 | 1,5 | 0,82 | 17 |



Rodamiento de bolas 61928-MA-C3-SKF

| Caractéristique | Valeur |
|----------------------------|--------------------------|
| d - Diámetro interior (mm) | 140 |
| D - Diámetro exterior (mm) | 190 |
| C - Espesor (mm) | 24 |
| Marca | SKF |
| Tipo del rodamiento | De bolas |
| Juego | Alta velocidad (C3, J30) |
| Tipo de sellado | No estanco |
| Tipo de jaula | Macisa latón |
| Rodamiento serie | 61900 - 6900 |
| Unidad de venta | pieza |

