


Rodamiento oscilante dos hileras de rodillos 22318-CC-W33

22318-CC-W33

LE BON ROULEMENT

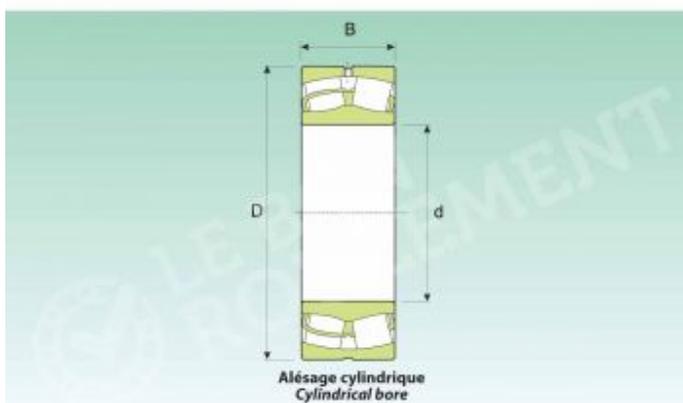

Alésage cylindrique
Cylindrical bore

| Dimensions (mm) Dimension (inch) | | | Coefficient de charge (EN) Load rating (kN) | | Vitesse linéaire (m/min) Speed limit (ft/min) | | Poids (kg) Weight (lb) | Sigle Designation | |
|-------------------------------------|-----------|-----------|--|--------------------------------------|--|-------|---------------------------|---|---------------------------------|
| d (mm) | D (mm) | B (mm) | Dynamique Dynamic C _r | Statique Static C ₀ | Lubrification Lubrication | 22318 | | Alésage cylindrique Cylindrical bore | Alésage conique Tapered bore |
| 90 | 130 | 64 | 508 | 681 | 2754 | | 3240 | 805 | 22318 |



Rodamiento oscilante dos hileras de rodillos 22318-CC-W33

| Caractéristique | Valeur |
|----------------------------|-------------------------|
| d - Diámetro interior (mm) | 90 |
| D - Diámetro exterior (mm) | 190 |
| C - Espesor (mm) | 64 |
| Marca | Genérica alta calidad |
| Tipo del rodamiento | Con rodillos oscilantes |
| Juego | Estándar |
| Tipo de sellado | No estanco |
| Tipo de jaula | Acero |
| Agujero | Cilíndrico/a |
| Rodamiento serie | 22300 |
| Unidad de venta | pieza |

