


Rodamiento oscilante dos hileras de rodillos 22319-CC-W33

22319-CC-W33

LE BON ROULEMENT

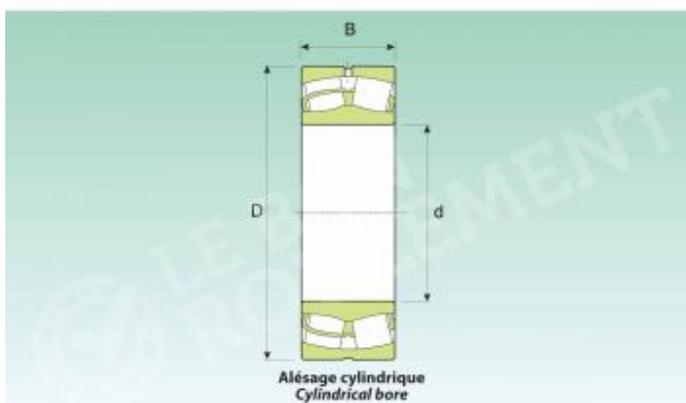

Alésage cylindrique
Cylindrical bore

| Dimensions (mm) Dimension (inch) | | | Coefficient de charge (EN) Load rating (kN) | | Vitesse linéaire (1/min) Speed limit (Rpm) | | Poids (kg) Weight (lb) | Sigle Designation | | |
|-------------------------------------|-----------|-----------|--|----------------------------|---|-------|---------------------------|---|---------------------------------|-------|
| d (mm) | D (mm) | B (mm) | Dynamique C _d | Statique C _s | Lubrification Lubrication | 22319 | | Alésage cylindrique Cylindrical bore | Alésage conique Tapered bore | |
| 98 | 206 | 67 | 8 | 807 | 750 | | 2001 | 3060 | 10,3 | 22319 |



Rodamiento oscilante dos hileras de rodillos 22319-CC-W33

| Caractéristique | Valeur |
|----------------------------|-------------------------|
| d - Diámetro interior (mm) | 95 |
| D - Diámetro exterior (mm) | 200 |
| C - Espesor (mm) | 67 |
| Marca | Genérica alta calidad |
| Tipo del rodamiento | Con rodillos oscilantes |
| Juego | Estándar |
| Tipo de sellado | No estanco |
| Tipo de jaula | Acero |
| Agujero | Cilíndrico/a |
| Rodamiento serie | 22300 |
| Unidad de venta | pieza |

