


Rodamiento oscilante dos hileras de rodillos 23122-C3

23122-C3

LE BON ROULEMENT

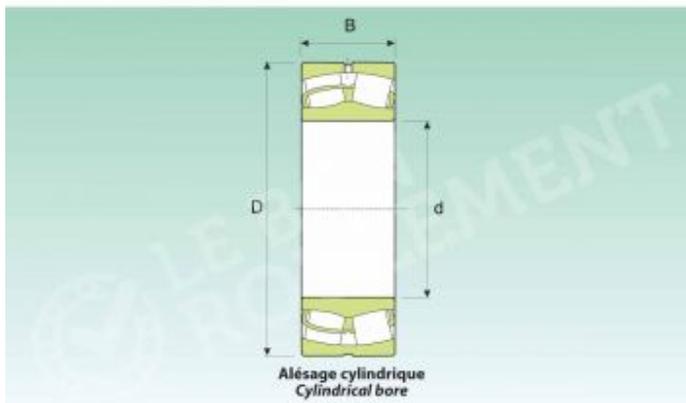

Alésage cylindrique
Cylindrical bore

Dimensions (mm) Dimension (mm)			Coefficient de charge (KM) Load rating (kW)		Vitesse limite (tr/min) Speed limit (RPM)		Lubrification Lubrication		Poids (kg) Weight (kg)	Sigle Designation	
d (mm)	D (mm)	B (mm)	Dynamique Dynamic C _d	Statique Static C _s	Grease	Oil	Alésage cylindrique Cylindrical bore	Alésage conique Tapered bore			
110	180	56	4.3	41	173	2704	1000	1.15	23122	23122K	



Rodamiento oscilante dos hileras de rodillos 23122-C3

Caractéristique	Valeur
d - Diámetro interior (mm)	110
D - Diámetro exterior (mm)	180
C - Espesor (mm)	56
Marca	Genérica alta calidad
Tipo del rodamiento	Con rodillos oscilantes
Juego	Alta velocidad (C3, J30)
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Rodamiento serie	23100
Unidad de venta	pieza

