


Rodamiento oscilante dos hileras de rodillos 24032-MB-
W33

24032-MB-W33



Dimensions (mm) Dimension (mm)				Coefficient de charge (kN) Load rating (kN)		Vitesse limite (tr/min) Speed limit (Rpm)		Poids (kg) Weight (kg)	Sigle Designation	
d (mm)	D (mm)	B (mm)	α (°mm)	Dynamique Dynamic C	Statique Static C ₀	Lubrification Lubrication			Alésage cylindrique Cylindrical bore	Alésage conique Tapered bore
						Graisse Grease	Huile Oil			
500	240	80	4.5	730	1170	Graisse Grease	Huile Oil	10	24032	24032 K10

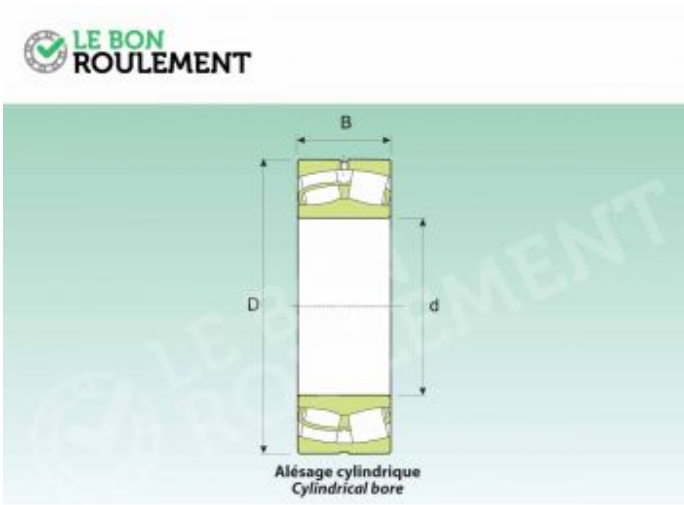

Rodamiento oscilante dos hileras de rodillos 24032-MB-W33

Caractéristique	Valeur
d - Diámetro interior (mm)	160
D - Diámetro exterior (mm)	240
C - Espesor (mm)	80
Marca	Genérica alta calidad
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Macisa latón
Agujero	Cilíndrico/a
Rodamiento serie	24000
Unidad de venta	pieza

