


Rodamiento oscilante dos hileras de rodillos 24132-CA-W33

24132-CA-W33



Dimensions (mm) Dimension (mm)			Coefficient de charge (C) Load rating (kN)		Vitesse limite (1/min) Speed limit (Rpm)		Poids (kg) Weight (kg)	Sigle Designation		
d (mm)	D (mm)	B (mm)	Dynamique C _d	Statique C _s	Lubrification Lubrication	Alésage cylindrique Cylindrical bore		Alésage conique Tapered bore		
					Graine Grease		Huile Oil			
50	270	100	4.5	3150	1720	14000	1210	2.1	24132	24132 K10

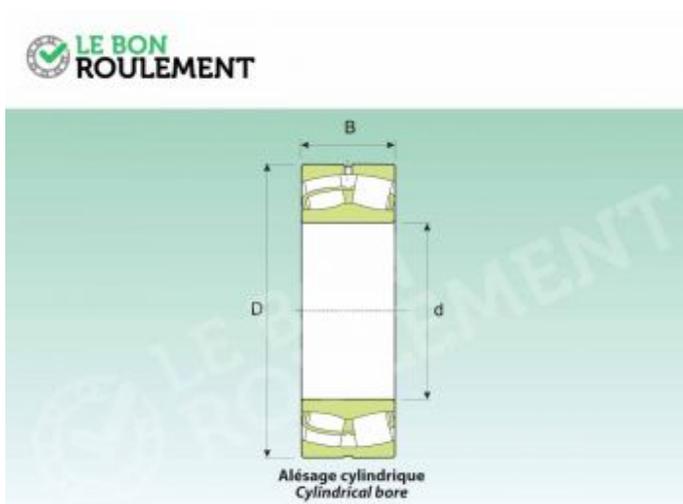

Rodamiento oscilante dos hileras de rodillos 24132-CA-W33

Caractéristique	Valeur
d - Diámetro interior (mm)	160
D - Diámetro exterior (mm)	270
C - Espesor (mm)	109
Marca	Genérica alta calidad
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Macisa latón
Agujero	Cilíndrico/a
Rodamiento serie	24100
Unidad de venta	pieza

