


# Rodamiento oscilante dos hileras de rodillos 24136-CA-W33

24136-CA-W33



Dimensions (mm) Dimension (mm)				Coefficient de charge (C) Load rating (kN)		Vitesse limite (1/min) Speed limit (Rpm)		Poids (kg) Weight (kg)	Sigle Designation	
d (mm)	D (mm)	B (mm)	K (mm)	Dynamique Dynamique C <sub>d</sub>	Statique Static C <sub>s</sub>	Lubrification Lubrication	24.3		Alésage cylindrique Cylindrical bore	Alésage conique Tapered bore
180	302	118	8	1572	2117	1120.5		1510	24.3	24136

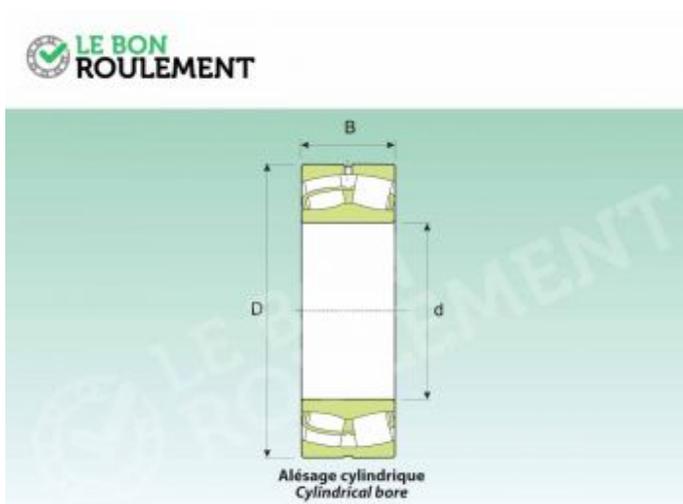

**Rodamiento oscilante dos hileras de rodillos 24136-CA-W33**

<b>Caractéristique</b>	<b>Valeur</b>
d - Diámetro interior (mm)	180
D - Diámetro exterior (mm)	300
C - Espesor (mm)	118
Marca	Genérica alta calidad
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Macisa latón
Agujero	Cilíndrico/a
Rodamiento serie	24100
Unidad de venta	pieza

