


Rodamiento oscilante dos hileras de rodillos 24128-MB-C3-W33

24128-MB-C3-W33



Dimensions (mm) Dimension (mm)				Coefficient de charge (KN) Load rating (kN)		Vitesse linéaire (1/min) Speed limit (Rpm)		Poids (kg) Weight (kg)	Sigle Designation	
d (mm)	D (mm)	B (mm)	r (mm)	Dynamique Dynamic C _d	Statique Static C _s	Lubrification Lubrication			Alésage cylindrique Cylindrical bore	Alésage conique Tapered bore
140	220	95	4.5	700	1137	1800	2150	10.5	24128	24128 K30

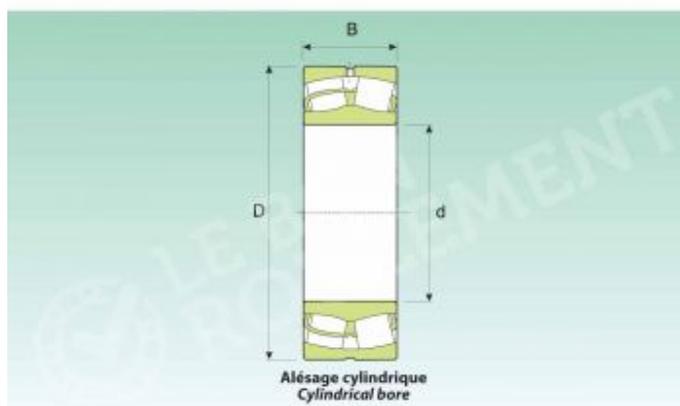

Rodamiento oscilante dos hileras de rodillos 24128-MB-C3-W33

Caractéristique	Valeur
d - Diámetro interior (mm)	140
D - Diámetro exterior (mm)	225
C - Espesor (mm)	85
Marca	Genérica alta calidad
Tipo del rodamiento	Con rodillos oscilantes
Juego	Alta velocidad (C3, J30)
Tipo de sellado	No estanco
Tipo de jaula	Macisa latón
Agujero	Cilíndrico/a
Rodamiento serie	24100
Unidad de venta	pieza

