


Rodamiento axial de agujas AXK160200

AXK160200



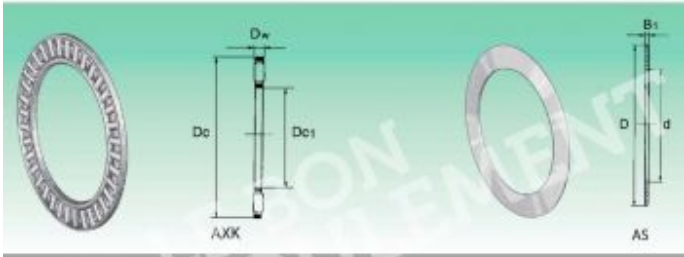

| Série | Code       | Poids kg | Série     | Poids kg | Dimensions (mm) |     |    |   | Coefficients de charge (N) |             |              | Vitesse limite (min/rev) |
|-------|------------|----------|-----------|----------|-----------------|-----|----|---|----------------------------|-------------|--------------|--------------------------|
|       |            |          |           |          | D1 x L x D2     | D1  | D2 | B | Dynamique C                | Statique C0 | Adm. (N/mm²) |                          |
| 160   | AXK 160200 | 240      | AS 160200 | 90       | 160             | 200 | 9  | 3 | 147 000                    | 1 013 000   | 1 500        |                          |



**Rodamiento axial de agujas AXK160200**

| Caractéristique            | Valeur                     |
|----------------------------|----------------------------|
| d - Diámetro interior (mm) | 160                        |
| D - Diámetro exterior (mm) | 200                        |
| C - Espesor (mm)           | 5                          |
| Marca                      | Genérica alta calidad      |
| Tipo del rodamiento        | Rodamiento axial de agujas |
| Tipo de jaula              | Acero                      |
| Rodamiento serie           | AXK                        |
| Unidad de venta            | pieza                      |

