


22320-EK-JA-VA405-SKF



Principal dimensions			Basic load ratings		Fatigue load limit		Speed ratings		Mass		Designations	
d	D	B	dynami- C	(static) C ₀	P ₀	Refer- ence speed	Lim- iting speed	kg	lb	Bearing with cylindrical bore	tapered bore	
mm	mm	mm	kN	kN	kN	min	min	kg	—			
500	215	72	815	950	88	2 400	3 000	15.5	—	* 23206JR/VMA05	* 23206KJR/VMA05	

Dimensions					Mounting and Fillet dimensions				Calculation Factors				Permissible accelerations	
d	d ₁	D ₁	b	R	r _{1,2} mm	d ₆ mm	D ₆ mm	r ₆ mm	a	V ₁	V ₂	V ₃	For all bearings operational time	
mm	mm	mm	mm	mm	mm	mm	mm	mm	—	m/s ²				
500	130	164	21.1	6	3	114	301	2.8	0.33	2	3	2	5.6g 20g	

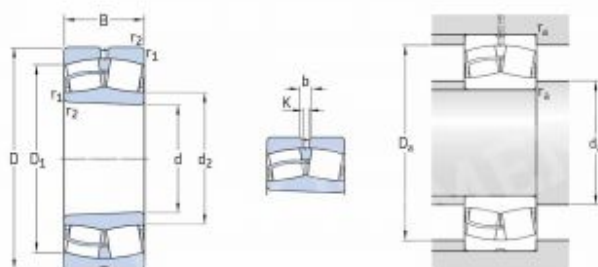

**Rodamiento oscilante dos hileras de rodillos 22320-EK-JA-
VA405-SKF**

Caractéristique	Valeur
d - Diámetro interior (mm)	100
D - Diámetro exterior (mm)	215
C - Espesor (mm)	73
Marca	SKF
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cónico/a
Especificaciones	Para aplicacion vibrante
Rodamiento serie	22300
Unidad de venta	pieza

